

Transmitters

DL-9H Digital UHF Handheld Microphone

- Dynamic capsule.
- Big Backlit LCD for easy reading.
- Auto Channel pairing by receiver.
- Sleek metallic housing with comfortable use.
- Micro-USB charging port.
- 2 AA battery powered.



Specifications	DL-9H
Oscillation type	4 GFSK
Carrier frequency range	794 ~ 928 MHz (country dependent)
Number of channels	7 ~ 50 (country dependent)
Antenna	Built-in
RF output	10 ~ 20 mW (country dependent)
Frequency response	70 Hz ~ 16 kHz
Sampling rate	Q @ 16 kHz HQ @ 48 kHz
Latency	4 ms
T.H.D.	1%
Battery	2 x AA 1.2V (Ni-MH), 2 x AA 1.5V (Alkaline)
Battery life	8 (Ni-MH) / 12 (Alkaline) hours typical
Dimensions (D x W x H)	48 x 258 (mm)
Weight	270 g (w/o battery)

DL-9T Digital UHF Bodypack Transmitter

- Big backlit LCD for easy reading.
- Auto Channel pairing by receiver.
- Sleek metallic housing with comfortable use.
- Micro-USB charging port.
- 2 AA battery powered.



Specifications	DL-9T
Oscillation type	4 GFSK
Carrier frequency range	794~ 928 MHz (country dependent)
Number of channels	7 ~ 50 (country dependent)
Antenna	Whip antenna
RF output	10 ~ 20 mW (country dependent)
Inputs	MIC in, Audio in
MIC in jack	mini XLR
Frequency response	70 Hz ~ 16 kHz
Sampling rate	Q @ 16 kHz HQ @ 48 kHz
Latency	4 ms
T.H.D.	1%
Battery	2 x AA 1.2V (Ni-MH), 2 x AA 1.5V (Alkaline)
Battery life	10 (Ni-MH) / 16 (Alkaline) hours typical
Dimensions (D x W x H)	85 x 64x 33 (mm) w/o antenna
Weight	115 g (w/o battery)

* Specifications are subject to change

Accessories

Microphones



Music Players | Receivers



Batteries



Other Parts



OKAYO ELECTRONICS CO., LTD.

No.2, Gongye 10th Rd., Dali Dist., Taichung 41280, Taiwan
 ☎ (886) 4 2491 4666
 ☎ (886) 4 2491 4755
 ✉ okayo@okayo.com
 @ www.okayo.com



ISO 9001:2015
 IECQ QC 080000
 Management System
 www.tuv.com
 ID: 9106300789



2016/1/10



DigiLINE

Digital Wireless PA System

DigiLINE Series

www.okayo.com

Receivers

DLR-9 | DLR-9AF Digital UHF Duo Receiver



- Backlit LCD display.
- Duo-receiver with individual controls.
- Signal strength display.
- Sync button to set channel on transmitter.

Specifications	DLR-9 DLR-9AF
Carrier frequency range	794~ 928 MHz (country dependent)
Number of channels	7 ~ 50 (country dependent)
Number of receivers	2
Display status	Channel number, frequency, signal strength, TX battery status
Sampling rate	Q @ 16 kHz HQ @ 48 kHz
Latency	4 ms
T.H.D.	1%
Frequency response	70 Hz ~ 16 kHz
Operating range	50 ~ 70 M (opening field)
Ambient temperature	10°C ~ 50°C
Dimensions (D x W x H)	102 x 88 x 37 (mm)
Weight	91 g

BX-501+ Bluetooth Module



- Bluetooth 3.0.
- SIG certified.
- Intelligent paired with devices.
- 10 M operating range.

Specifications	BX-501+
Power requirement	12V
Profiles	A2DP
Operating range	10 M
Dimensions (D x W x H)	103 x 88 x 37 (mm)
Weight	50 g

DL-9R Digital UHF Bodypack Receiver

- Sleek metallic housing with comfortable use.
- Backlit LCD for easy reading.
- Micro-USB charging port.
- 2 AA battery powered.



Specifications	DL-9R
Carrier frequency range	794~ 928 MHz (country dependent)
Number of channels	7 ~ 50 (country dependent)
Antenna	Whip antenna
Display status	Channel number, frequency, signal strength, battery status
Sampling rate	Q @ 16 kHz HQ @ 48 kHz
Latency	4 ms
T.H.D.	1%
Frequency response	70 Hz ~ 16 kHz
Earphone jack	Ø3.5 mm (stereo)
Audio out	700 mV
Operating range	50 ~ 70 M (opening field)
Ambient temperature	10°C ~ 50°C
Dimensions (D x W x H)	85 x 64 x 33 (mm), w/o antenna
Weight	115 g (w/o battery)

* Specifications are subject to change



DigiLINE 850

Digital UHF | 150W

10" speaker | Bluetooth | 500+ crowd



With up to 150+ watts powerful output, 4 wireless microphones and 1 air-linked audio transmitter, DL-850 is perfect to build an event and loud enough sounding experience at a large place. Ease of use, high mobility for setup, various music players for demand; a reliable sounding buddy for crowd up to 500+.

Features

- 150 watts (max.) powerful output.
- Two-way speaker – 8" woofer and 1" tweeter.
- Supports 2 receivers for up to 4 wireless microphones.
- SYNC to set microphone at same channel as receiver.
- Bluetooth function for audio streaming from smartphone and tablet.
- Featured with Voice Priority.
- 4-LED battery meter for charging indication and power status.
- Two power models – AC or battery powered.
- Various music players (SD/CD/DVD/USB) for option.
- Runs 4-6 hours on a charge.
- High mobility with retractable handle and wheels.




Specifications	PA system
Output power	150W (max.) / 120W (RMS)
Battery	12V, 4.5 Ah x 2 (Lead-Acid) rechargeable batteries
Charging time	6 ~ 8 hours
Dimensions (D x W x H)	310 x 360 x 580 (mm)
Weight	Approx. 18 kg (40 lbs), batteries included.
Wireless System	
Carrier frequency	794 ~ 928 MHz (country dependent)
Number of channels	7 ~ 50 (country dependent)
Frequency response	70 Hz ~ 16 kHz
Latency	4 ms
Operating range	50 ~ 70 M (opening field)



DigiLINE 820

Digital UHF | 120W

8" speaker | Bluetooth | 300+ crowd

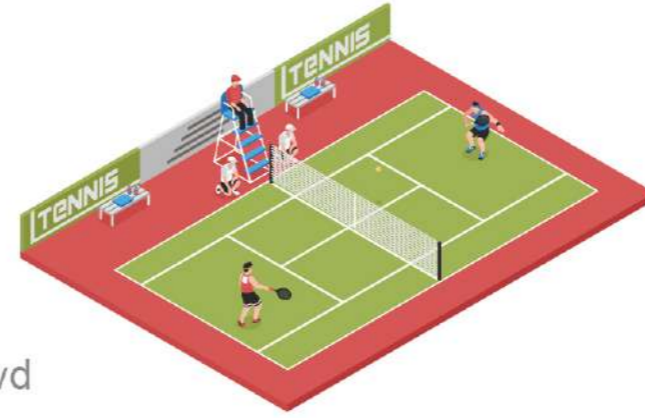

DigiLINE, the brand new wireless portable PA system, employing the leading digital technology in UHF spectrum for better sound projection and less noise experience. Moderate size with class D amplifier is a good fit for crowd up to 300+. Bluetooth and optional music players along with the highly mobile wheels make it a really performance mate on the move.

Features

- 120 watts (max.) powerful output.
- Two-way speaker – 8" woofer and 1" tweeter.
- Supports 2 receivers for up to 4 wireless microphones.
- SYNC to set microphone at same channel as receiver.
- Bluetooth function for audio streaming from smartphone and tablet.
- Featured with Voice Priority.
- 4-LED battery meter for charging indication and power status.
- Two power models – AC or battery powered.
- Various music players (SD/CD/DVD/USB) for option.
- Runs 4-6 hours on a charge.
- High mobility with retractable handle and wheels.



Specifications	PA system
Output power	120W (max.) / 80W (RMS)
Battery	12V, 4.5 Ah x 2 (Lead-Acid) rechargeable batteries
Charging time	6 ~ 8 hours
Dimensions (D x W x H)	264 x 301 x 511 (mm)
Weight	Approx. 16 kg (35 lbs), batteries included.
Wireless System	
Carrier frequency	794 ~ 928 MHz (country dependent)
Number of channels	7 ~ 50 (country dependent)
Frequency response	70 Hz ~ 16 kHz
Latency	4 ms
Operating range	50 ~ 70 M (opening field)



DigiLINE 650

Digital UHF | 60W

5" Neo | Bluetooth | 100+ crowd



It is compact, lightweight, small but rich and convenient to transport it to anywhere and create your own personal audio entertainment, also impressive of its superior audio quality with various product functions.

Features

- 60 watts (max.) powerful output.
- Two-way speaker – 5" Neodymium woofer and 1" tweeter.
- Supports 2 receivers for up to 4 wireless microphone.
- SYNC to set microphone at same channel as receiver.
- USB/MP3 audio player for option.
- Bluetooth function for audio streaming from smartphone and tablet.
- 4-LED battery meter for charging and power status.
- Voice priority allows a reduced music volume when a microphone is used.
- Two power modes – AC or Battery powered.
- Runs 4-6 hours on a charge.



Specifications	PA system
Output power	60W (max.) / 40W (RMS)
Battery	12V, 2.9 Ah (Lead-Acid) rechargeable battery
Charging time	7 ~ 8 hours
Dimensions (D x W x H)	201 x 170 x 341 (mm)
Weight	Approx. 4.3 kg (9.5 lbs), battery included
Wireless System	
Carrier frequency	794 ~ 928 MHz (country dependent)
Number of channels	7 ~ 50 (country dependent)
Frequency response	70 Hz ~ 16 kHz
Latency	4 ms
Operating range	50 ~ 70 M (opening field)



DigiLINE 550

Digital UHF | 60W

5" Neo | Bluetooth | 100+ crowd



It is not just a simple shoulder carry amplifier speaker. But it is compact and 60W powerful battery powered sound reinforcement for any environment. Ideal for meeting room, club, party, fitness or classroom and middle group of crowd.

Features

- 60 watts (max.) powerful output.
- 5" Neodymium speaker delivers great sound projection.
- Supports 2 receivers for up to 4 wireless microphones.
- SYNC to set microphone at same channel as receiver.
- USB/MP3 audio player for option.
- Optional Bluetooth function for audio streaming from smartphone and tablet.
- 4-LED battery meter for charging and power status.
- Voice priority allows a reduced music volume when a microphone is used.
- Two power modes – AC or Battery powered.
- Runs 4-6 hours on a charge.



Specifications	PA system
Output power	60W (max.) / 40W (RMS)
Battery	12V, 2.9 Ah (Lead-Acid) rechargeable battery
Charging time	7 ~ 8 hours
Dimensions (D x W x H)	333 x 153 x 246 (mm)
Weight	Approx. 3.8 kg (8 lbs), battery included.
Wireless System	
Carrier frequency	794 ~ 928 MHz (country dependent)
Number of channels	7 ~ 50 (country dependent)
Frequency response	70 Hz ~ 16 kHz
Latency	4 ms
Operating range	50 ~ 70 M (opening field)

*Specifications are subject to change

www.okayo.com